


| REVISIONS | | | | REVISIONS | | | |
|-----------|-------------|------|----------|-----------|-------------|------|----------|
| REV | DESCRIPTION | DATE | APPROVED | REV | DESCRIPTION | DATE | APPROVED |
| | | | | | | | |
| | | | | | | | |

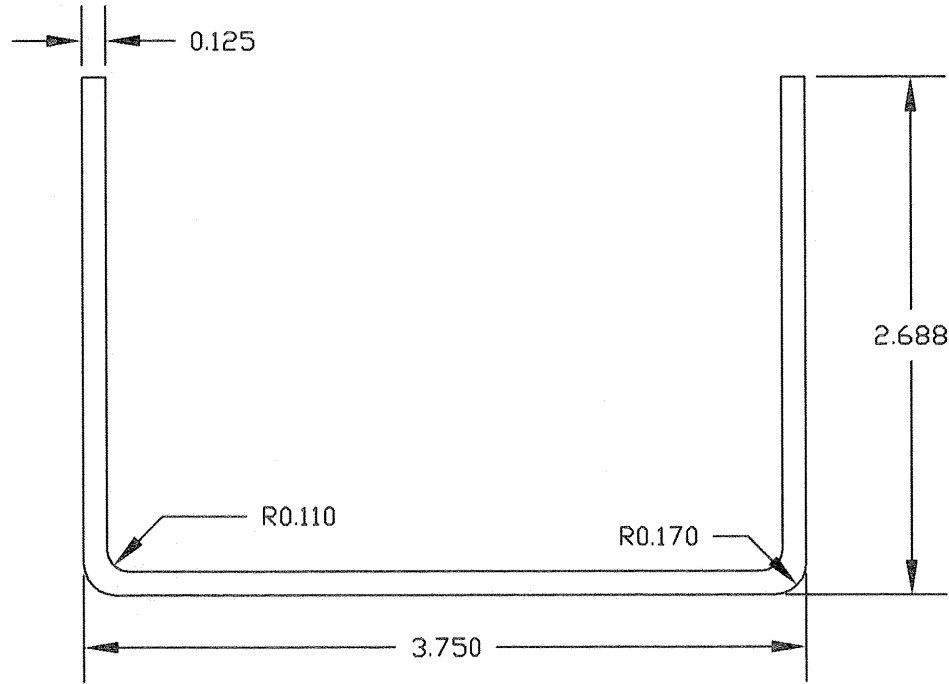

STANDARD LENGTH IS 81 3/4"

| | | | | | | | |
|---|--|--|--|--|----------|--|-------|
| Tolerances: Length +/- .125" Width +/- .040" Height +/- .020" Straightness +/- .050"/Ft. | | Leg Angularity +/- 3° Thickness +/- .015" Twist 1°/Ft. | | Polyply Composites Inc. 1540 Marion St. Grand Haven, Mi. 49417 Phone: (616)842-6330 Fax: (616)842-5320 email: polyply@polyplycomposites.com | | Fiberglass Compression Molded Channel #3106 SM530-30 (GP03) Material | |
| 1st Approval & Date | | 2nd Approval & Date | | SIZE | FSCM NO. | DWG NO. | REV A |
| <i>Thomas Salter</i> 1/26/05 | | <i>G. J. [Signature]</i> 1/26/05 | | SCALE 1:1 | SHEET | | |